MEASURING GAUGE

- METROLOGY® 台灣黑馬牌全新量規系列產品,結構及設計更獨特，更創新，品質、功能、精度完全升級，絕對物超所值，完全可滿足您的需求和值得您的信任
- 量測精度均參照德國DIN、ISO、日本JIS、美國ASME及台灣JCC自訂之規範要求，附符合ISO認證之JCC(JINGSTONE CALIBRATION CENTER)原廠英文精度校正報告


鋼鐵材料


加工成型


高溫處理


研磨拋光

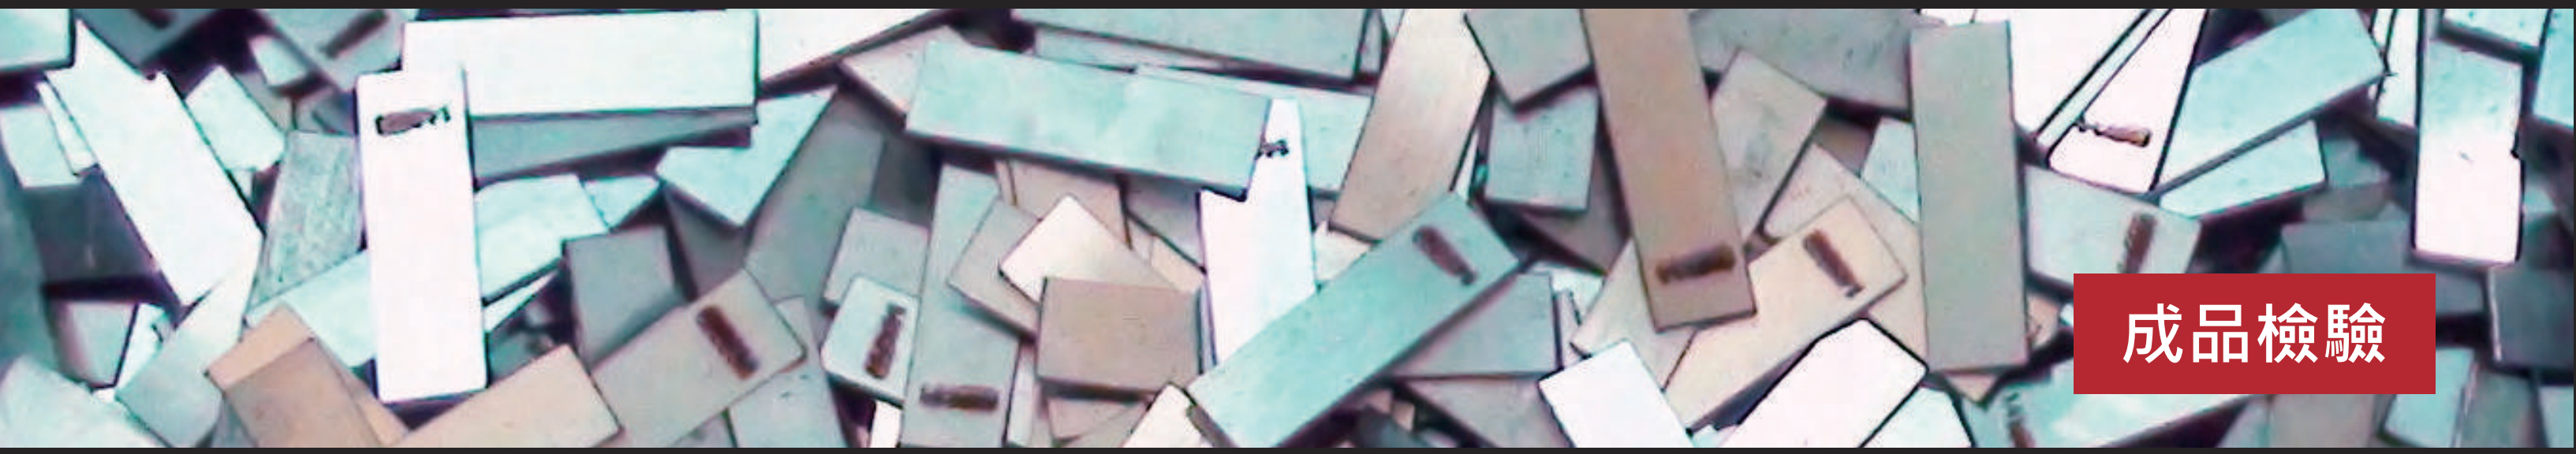
成品檢驗

DIN 861/ISO 3650

精密塊規精度表(公制)

Nominal length range mm		Permissible tolerances and variances (µm)												
		Grades 00 and K				Grade 0			Grade 1			Grade2		
		Tolerance on nominal length at all points		Permissible length variation	Max. deviation from flatness	Tolerance on nominal length at all points	Permissible length variation	Max. deviation from flatness	Tolerance on nominal length at all points	Permissible variation in length	Max. deviation from flatness	Tolerance on nominal length at all points	Permissible length variation	Max. deviation from flatness
Over	Up to (including)	00	K											
–	10	±0.06	±0.20	0.05	0.05	±0.12	0.10	0.10	±0.20	0.16	0.15	±0.45	0.30	0.25
10	25	±0.07	±0.30	0.05	0.05	±0.14	0.10	0.10	±0.30	0.16	0.15	±0.60	0.30	0.25
25	50	±0.10	±0.40	0.06	0.05	±0.20	0.10	0.10	±0.40	0.18	0.15	±0.80	0.30	0.25
50	75	±0.12	±0.50	0.06	0.05	±0.25	0.12	0.10	±0.50	0.18	0.15	±1.00	0.35	0.25
75	100	±0.14	±0.60	0.07	0.05	±0.30	0.12	0.10	±0.60	0.20	0.15	±1.20	0.35	0.25
100	150	—	±0.80	0.08	0.05	±0.40	0.14	0.10	±0.80	0.20	0.15	±1.60	0.40	0.25
150	200	—	±1.00	0.09	0.10	±0.50	0.16	0.15	±1.00	0.25	0.18	±2.00	0.40	0.25
200	250	—	±1.20	0.10	0.10	±0.60	0.16	0.15	±1.20	0.25	0.18	±2.40	0.45	0.25
250	300	—	±1.40	0.10	0.10	±0.70	0.18	0.15	±1.40	0.25	0.18	±2.80	0.50	0.25
300	400	—	±1.80	0.12	0.10	±0.90	0.20	0.15	±1.80	0.30	0.18	±3.60	0.50	0.25
400	500	—	±2.20	0.14	0.10	±1.10	0.25	0.15	±2.20	0.35	0.18	±4.40	0.60	0.25
500	600	—	±2.60	0.16	0.15	±1.30	0.25	0.18	±2.60	0.40	0.20	±5.00	0.70	0.25
600	700	—	±3.00	0.18	0.15	±1.50	0.30	0.18	±3.00	0.45	0.20	±6.00	0.70	0.25
700	800	—	±3.40	0.20	0.15	±1.70	0.30	0.18	±3.40	0.50	0.20	±6.50	0.80	0.25
800	900	—	±3.80	0.20	0.15	±1.90	0.35	0.18	±3.80	0.50	0.20	±7.50	0.90	0.25
900	1000	—	±4.20	0.25	0.15	±2.00	0.40	0.18	±4.20	0.60	0.20	±8.00	1.00	0.25

ASME B89.1.9-2002

MAXIMUM PERMITTED DEVIATIONS OF THE LENGTH AT ANY POINT AND TOLERANCE ON VARIATION IN LENGTH FOR INCH GAUGE BLOCKS

精密塊規精度表(英制)

Nominal Length Range l_n in inches	Calibration Grade K		Grade 00		Grade 0		Grade AS-1		Grade AS-2	
	Limit Deviations of Length at any Point From Nominal Length $\pm t_e$ µin.	Tolerance for the Variation in Length t_v µin.	Limit Deviations of Length at any Point From Nominal Llength $\pm t_e$ µin.	Tolerance for the Variation in Length t_v µin.	Limit Deviations of Length at any Point From Nominal Length $\pm t_e$ µin.	Tolerance for the Variation in Length t_v µin.	Limit Deviations of Length at any Point From Nominal Length $\pm t_e$ µin.	Tolerance for the Variation in Length t_v µin.	Limit Deviations of Length at any Point From Nominal Length $\pm t_e$ µin.	Tolerance for the Variation in Length t_v µin.
$l_n \le 0.05$	12	2	4	2	6	4	12	6	24	12
$0.05 < l_n \le 0.4$	10	2	3	2	5	4	8	6	18	12
$0.45 < l_n \le 1$	12	2	3	2	6	4	12	6	24	12
$1 < l_n \le 2$	16	2	4	2	8	4	16	6	32	12
$2 < l_n \le 3$	20	2	5	3	10	4	20	6	40	14
$3 < l_n \le 4$	24	3	6	3	12	5	24	8	48	14
$4 < l_n \le 5$	32	3	8	3	16	5	32	8	64	16
$5 < l_n \le 6$	32	3	8	3	16	5	32	8	64	16
$6 < l_n \le 7$	40	4	10	4	20	6	40	10	80	16
$7 < l_n \le 8$	40	4	10	4	20	6	40	10	80	16
$8 < l_n \le 10$	48	4	12	4	24	6	48	10	104	18
$10 < l_n \le 12$	56	4	14	4	28	7	56	10	112	20
$12 < l_n \le 16$	72	5	18	5	36	8	72	12	144	20
$16 < l_n \le 20$	88	6	20	6	44	10	88	14	176	24
$20 < l_n \le 24$	104	6	25	6	52	10	104	16	200	28
$24 < l_n \le 28$	120	7	30	7	60	12	120	18	240	28
$28 < l_n \le 32$	136	8	34	8	68	12	136	20	260	32
$32 < l_n \le 36$	152	8	38	8	76	14	152	20	300	36
$36 < l_n \le 40$	160	10	40	10	80	16	168	24	320	40

■ 標準塊規【整組】
材質：硬鋼　硬度：HV650~800

最佳選擇標章
台灣優良產品金鑽獎

型號	規格(mm)	間隔(mm)	塊數
GB-9122-0 等級：0級 GB-9122-1 等級：1級 GB-9122-2 等級：2級	1.0005 1.001-1.009 1.01-1.49 1.6-1.9 0.5-24.5 30-100 25,75	0.0005 0.001 0.01 0.1 0.5 10 -	1 9 49 4 49 8 2
GB-9112-0 等級：0級 GB-9112-1 等級：1級 GB-9112-2 等級：2級	1.0005 1.001-1.009 1.01-1.49 0.5-24.5 25-100	0.0005 0.001 0.01 0.5 25	1 9 49 49 4
GB-9103-0 等級：0級 GB-9103-1 等級：1級 GB-9103-2 等級：2級	1.005 1.01-1.49 0.5-24.5 25-100	0.005 0.01 0.5 25	1 49 49 4
GB-9087-0 等級：0級 GB-9087-1 等級：1級 GB-9087-2 等級：2級	1.001-1.009 1.01-1.49 0.5-9.5 10-100	0.001 0.01 0.5 10	9 49 19 10

型號	規格(mm)	間隔(mm)	塊數
GB-9047-0 等級：0級 GB-9047-1 等級：1級 GB-9047-2 等級：2級	1.005 1.01-1.09 1.1-1.9 1-24 25-100	0.005 0.01 0.1 1 25	1 9 9 24 4
GB-9038-0 等級：0級 GB-9038-1 等級：1級 GB-9038-2 等級：2級	1.005 1.01-1.09 1.1-1.9 1-9 10-100	0.005 0.01 0.1 1 10	1 9 9 9 10
GB-9020-0 等級：0級 GB-9020-1 等級：1級	5-100	5	20
GB-9010-0 等級：0級 GB-9010-1 等級：1級	1.0-1.5 2.0-3.0 5.0-25.0	0.25 1 5	3 2 5
GB-9009-0 等級：0級 GB-9009-1 等級：1級	1.001-1.009	0.001	9

* 精度：依據DIN 861 / ISO 3650標準
* 整組均附JCC出廠檢驗合格校正報告

■ 標準塊規【外徑測微器專用】

用途：專為外徑測微器量測鉆面平行度和尺寸精度校正用

GB-9012-0

材質：硬鋼

型號	規格(mm)	間隔(mm)	塊數
GB-9012-0 等級：0 級	2.5, 5.1, 7.7, 10.3, 12.9	2.6	5
	15, 17.6, 20.2, 22.8	2.6	4
GB-9012-1 等級：1 級	25, 50, 75	25	3

材質：陶瓷

型號	規格(mm)	間隔(mm)	塊數
GB-C9012-0 等級：0 級	2.5, 5.1, 7.7, 10.3, 12.9	2.6	5
	15, 17.6, 20.2, 22.8	2.6	4
GB-C9012-1 等級：1 級	25, 50, 75	25	3

* 精度：依據DIN 861 / ISO 3650標準　* 整組均附JCC出廠檢驗合格校正報告

■ 標準塊規【長塊規】

用途：專為中大型之量具、儀器、量測設備、專用機、工作母機進行精度校驗用

GB-9008M

型號	規格(mm)	間隔(mm)	塊數
GB-908S-0 等級：0 級	25, 50		
GB-908S-1 等級：1 級	75, 100 125, 150	25	8
GB-908S-2 等級：2 級	175, 200		
GB-908M-0 等級：0 級	125, 150	25	
GB-908M-1 等級：1 級	175, 200 250, 300	25 50	8
GB-908M-2 等級：2 級	400, 500	100	

型號	規格(mm)	間隔(mm)	塊數
GB-905L-0 等級：0 級	600, 700		
GB-905L-1 等級：1 級	800, 900	100	5
GB-905L-2 等級：2 級	1000		

* 精度：依據DIN 861 / ISO 3650標準
* 整組均附JCC出廠檢驗合格校正報告
* 材質：硬鋼　硬度：HV650~800
* 亦可提供英吋規格之長塊規

最佳選擇標章
台灣優良產品金鑽獎

■ 標準塊規【單片】

材質：硬鋼　硬度：HV650~800

型號	規格(mm)	等級
GB-0.3-1	0.3	1
GB-0.4-1	0.4	1
GB-0.5-0	0.5	0
GB-0.5-1		1
GB-0.6-0	0.6	0
GB-0.6-1		1
GB-0.7-0	0.7	0
GB-0.7-1		1
GB-0.8-0	0.8	0
GB-0.8-1		1
GB-0.9-0	0.9	0
GB-0.9-1		1
GB-1.0-0	1.0	0
GB-1.0-1		1
GB-1.0005-0	1.0005	0
GB-1.0005-1		1
GB-1.001-0	1.001	0
GB-1.001-1		1
GB-1.002-0	1.002	0
GB-1.002-1		1
GB-1.003-0	1.003	0
GB-1.003-1		1
GB-1.004-0	1.004	0
GB-1.004-1		1
GB-1.005-0	1.005	0
GB-1.005-1		1
GB-1.006-0	1.006	0
GB-1.006-1		1
GB-1.007-0	1.007	0
GB-1.007-1		1

*精度：依據DIN 861/ ISO 3650標準
*單片均附JCC出廠檢驗合格校正報告
*特殊規格可訂製，單一規格最小訂購量6片

型號	規格(mm)	等級
GB-1.008-0	1.008	0
GB-1.008-1		1
GB-1.009-0	1.009	0
GB-1.009-1		1
GB-1.01-0	1.01	0
GB-1.01-1		1
GB-1.02-0	1.02	0
GB-1.02-1		1
GB-1.03-0	1.03	0
GB-1.03-1		1
GB-1.04-0	1.04	0
GB-1.04-1		1
GB-1.05-0	1.05	0
GB-1.05-1		1
GB-1.06-0	1.06	0
GB-1.06-1		1
GB-1.07-0	1.07	0
GB-1.07-1		1
GB-1.08-0	1.08	0
GB-1.08-1		1
GB-1.09-0	1.09	0
GB-1.09-1		1
GB-1.1-0	1.1	0
GB-1.1-1		1
GB-1.11-0	1.11	0
GB-1.11-1		1
GB-1.12-0	1.12	0
GB-1.12-1		1
GB-1.13-0	1.13	0
GB-1.13-1		1
GB-1.14-0	1.14	0
GB-1.14-1		1
GB-1.15-0	1.15	0
GB-1.15-1		1

型號	規格(mm)	等級
GB-1.16-0	1.16	0
GB-1.16-1		1
GB-1.17-0	1.17	0
GB-1.17-1		1
GB-1.18-0	1.18	0
GB-1.18-1		1
GB-1.19-0	1.19	0
GB-1.19-1		1
GB-1.2-0	1.2	0
GB-1.2-1		1
GB-1.21-0	1.21	0
GB-1.21-1		1
GB-1.22-0	1.22	0
GB-1.22-1		1
GB-1.23-0	1.23	0
GB-1.23-1		1
GB-1.24-0	1.24	0
GB-1.24-1		1
GB-1.25-0	1.25	0
GB-1.25-1		1
GB-1.26-0	1.26	0
GB-1.26-1		1
GB-1.27-0	1.27	0
GB-1.27-1		1
GB-1.28-0	1.28	0
GB-1.28-1		1
GB-1.29-0	1.29	0
GB-1.29-1		1
GB-1.3-0	1.3	0
GB-1.3-1		1
GB-1.31-0	1.31	0
GB-1.31-1		1
GB-1.32-0	1.32	0
GB-1.32-1		1

■ 標準塊規【單片】

材質：硬鋼　硬度：HV650~800

最佳選擇標章
台灣優良產品金鑽獎

型號	規格(mm)	等級
GB-1.33-0	1.33	0
GB-1.33-1		1
GB-1.34-0	1.34	0
GB-1.34-1		1
GB-1.35-0	1.35	0
GB-1.35-1		1
GB-1.36-0	1.36	0
GB-1.36-1		1
GB-1.37-0	1.37	0
GB-1.37-1		1
GB-1.38-0	1.38	0
GB-1.38-1		1
GB-1.39-0	1.39	0
GB-1.39-1		1
GB-1.4-0	1.4	0
GB-1.4-1		1
GB-1.41-0	1.41	0
GB-1.41-1		1
GB-1.42-0	1.42	0
GB-1.42-1		1
GB-1.43-0	1.43	0
GB-1.43-1		1
GB-1.44-0	1.44	0
GB-1.44-1		1
GB-1.45-0	1.45	0
GB-1.45-1		1
GB-1.46-0	1.46	0
GB-1.46-1		1
GB-1.47-0	1.47	0
GB-1.47-1		1
GB-1.48-0	1.48	0
GB-1.48-1		1
GB-1.49-0	1.49	0
GB-1.49-1		1

型號	規格(mm)	等級
GB-1.5-0	1.5	0
GB-1.5-1		1
GB-1.6-0	1.6	0
GB-1.6-1		1
GB-1.7-0	1.7	0
GB-1.7-1		1
GB-1.8-0	1.8	0
GB-1.8-1		1
GB-1.9-0	1.9	0
GB-1.9-1		1
GB-2.0-0	2.0	0
GB-2.0-1		1
GB-2.5-0	2.5	0
GB-2.5-1		1
GB-3.0-0	3.0	0
GB-3.0-1		1
GB-3.5-0	3.5	0
GB-3.5-1		1
GB-4.0-0	4.0	0
GB-4.0-1		1
GB-4.5-0	4.5	0
GB-4.5-1		1
GB-5.0-0	5.0	0
GB-5.0-1		1
GB-5.5-0	5.5	0
GB-5.5-1		1
GB-6.0-0	6.0	0
GB-6.0-1		1
GB-6.5-0	6.5	0
GB-6.5-1		1
GB-7.0-0	7.0	0
GB-7.0-1		1
GB-7.5-0	7.5	0
GB-7.5-1		1

型號	規格(mm)	等級
GB-8.0-0	8.0	0
GB-8.0-1		1
GB-8.5-0	8.5	0
GB-8.5-1		1
GB-9.0-0	9.0	0
GB-9.0-1		1
GB-9.5-0	9.5	0
GB-9.5-1		1
GB-10.0-0	10.0	0
GB-10.0-1		1
GB-10.5-0	10.5	0
GB-10.5-1		1
GB-11.0-0	11.0	0
GB-11.0-1		1
GB-11.5-0	11.5	0
GB-11.5-1		1
GB-12.0-0	12.0	0
GB-12.0-1		1
GB-12.5-0	12.5	0
GB-12.5-1		1
GB-13.0-0	13.0	0
GB-13.0-1		1
GB-13.5-0	13.5	0
GB-13.5-1		1
GB-14.0-0	14.0	0
GB-14.0-1		1
GB-14.5-0	14.5	0
GB-14.5-1		1
GB-15.0-0	15.0	0
GB-15.0-1		1

*精度：依據DIN 861/ ISO 3650標準
*單片均附JCC出廠檢驗合格校正報告
*特殊規格可訂製，單一規格最小訂購量6片

最佳選擇標章
台灣優良產品金鑽獎

■ 標準塊規【單片】

材質：硬鋼　硬度：HV650~800

型號	規格(mm)	等級
GB-15.5-0	15.5	0
GB-15.5-1		1
GB-16.0-0	16.0	0
GB-16.0-1		1
GB-16.5-0	16.5	0
GB-16.5-1		1
GB-17.0-0	17.0	0
GB-17.0-1		1
GB-17.5-0	17.5	0
GB-17.5-1		1
GB-18.0-0	18.0	0
GB-18.0-1		1
GB-18.5-0	18.5	0
GB-18.5-1		1
GB-19.0-0	19.0	0
GB-19.0-1		1
GB-19.5-0	19.5	0
GB-19.5-1		1
GB-20.0-0	20.0	0
GB-20.0-1		1
GB-20.5-0	20.5	0
GB-20.5-1		1
GB-21.0-0	21.0	0
GB-21.0-1		1
GB-21.5-0	21.5	0
GB-21.5-1		1
GB-22.0-0	22.0	0
GB-22.0-1		1
GB-22.5-0	22.5	0
GB-22.5-1		1
GB-23.0-0	23.0	0
GB-23.0-1		1
GB-23.5-0	23.5	0
GB-23.5-1		1

型號	規格(mm)	等級
GB-24.0-0	24.0	0
GB-24.0-1		1
GB-24.5-0	24.5	0
GB-24.5-1		1
GB-25.0-0	25	0
GB-25.0-1		1
GB-30.0-0	30	0
GB-30.0-1		1
GB-35.0-0	35	0
GB-35.0-1		1
GB-40.0-0	40	0
GB-40.0-1		1
GB-45.0-0	45	0
GB-45.0-1		1
GB-50.0-0	50	0
GB-50.0-1		1
GB-55.0-0	55	0
GB-55.0-1		1
GB-60.0-0	60	0
GB-60.0-1		1
GB-65.0-0	65	0
GB-65.0-1		1
GB-70.0-0	70	0
GB-70.0-1		1
GB-75.0-0	75	0
GB-75.0-1		1
GB-80.0-0	80	0
GB-80.0-1		1
GB-85.0-0	85	0
GB-85.0-1		1
GB-90.0-0	90	0
GB-90.0-1		1
GB-95.0-0	95	0
GB-95.0-1		1

型號	規格(mm)	等級
GB-100.0-0	100	0
GB-100.0-1		1
GB-125.0-0	125	0
GB-125.0-1		1
GB-150.0-0	150	0
GB-150.0-1		1
GB-175.0-0	175	0
GB-175.0-1		1
GB-200.0-0	200	0
GB-200.0-1		1
GB-250.0-0	250	0
GB-250.0-1		1
GB-300.0-0	300	0
GB-300.0-1		1
GB-400.0-0	400	0
GB-400.0-1		1
GB-500.0-0	500	0
GB-500.0-1		1
GB-600.0-0	600	0
GB-600.0-1		1
GB-700.0-0	700	0
GB-700.0-1		1
GB-800.0-0	800	0
GB-800.0-1		1
GB-900.0-0	900	0
GB-900.0-1		1
GB-1000.0-0	1000	0
GB-1000.0-1		1

*精度：依據DIN 861/ ISO 3650標準
*單片均附JCC出廠檢驗合格校正報告
*特殊規格可訂製，單一規格最小訂購量6片

■ 標準塊規【整組】
材質：鎢鋼　硬度：HV1300~1600

最佳選擇標章
台灣優良產品金鑽獎

	規格(mm)	間隔(mm)	塊數
GB-T9122-0 等級：0 級 GB-T9122-1 等級：1 級 GB-T9122-2 等級：2 級	1.0005 1.001-1.009 1.01-1.49 1.6-1.9 0.5-24.5 30-100 25,75	0.0005 0.001 0.01 0.1 0.5 10 -	1 9 49 4 49 8 2
GB-T9112-0 等級：0 級 GB-T9112-1 等級：1 級 GB-T9112-2 等級：2 級	1.0005 1.001-1.009 1.01-1.49 0.5-24.5 25-100	0.0005 0.001 0.01 0.5 25	1 9 49 49 4
GB-T9103-0 等級：0 級 GB-T9103-1 等級：1 級 GB-T9103-2 等級：2 級	1.005 1.01-1.49 0.5-24.5 25-100	0.005 0.01 0.5 25	1 49 49 4
GB-T9087-0 等級：0 級 GB-T9087-1 等級：1 級 GB-T9087-2 等級：2 級	1.001-1.009 1.01-1.49 0.5-9.5 10-100	0.001 0.01 0.5 10	9 49 19 10

型號	規格(mm)	間隔(mm)	塊數
GB-T9047-0 等級：0 級 GB-T9047-1 等級：1 級 GB-T9047-2 等級：2 級	1.005 1.01-1.09 1.1-1.9 1-24 25-100	0.005 0.01 0.1 1 25	1 9 9 24 4
GB-T9038-0 等級：0 級 GB-T9038-1 等級：1 級 GB-T9038-2 等級：2 級	1.005 1.01-1.09 1.1-1.9 1-9 10-100	0.005 0.01 0.1 1 10	1 9 9 9 10
GB-T9010-0 等級：0 級 GB-T9010-1 等級：1 級	1.0-1.5 2.0-3.0 5.0-25.0	0.25 1 5	3 2 5
GB-T9009-0 等級：0 級 GB-T9009-1 等級：1 級	1.001-1.009	0.001	9

* 精度：依據DIN 861 / ISO 3650標準
* 整組均附JCC出廠檢驗合格校正報告

最佳選擇標章
台灣優良產品金鑽獎

■ 標準塊規【單片】

材質：鎢鋼　硬度：HV1300~1600

型號	規格(mm)	等級
GB-T0.5-0	0.5	0
GB-T0.5-1		1
GB-T1.0-0	1.0	0
GB-T1.0-1		1
GB-T1.0005-0	1.0005	0
GB-T1.0005-1		1
GB-T1.001-0	1.001	0
GB-T1.001-1		1
GB-T1.002-0	1.002	0
GB-T1.002-1		1
GB-T1.003-0	1.003	0
GB-T1.003-1		1
GB-T1.004-0	1.004	0
GB-T1.004-1		1
GB-T1.005-0	1.005	0
GB-T1.005-1		1
GB-T1.006-0	1.006	0
GB-T1.006-1		1
GB-T1.007-0	1.007	0
GB-T1.007-1		1
GB-T1.008-0	1.008	0
GB-T1.008-1		1
GB-T1.009-0	1.009	0
GB-T1.009-1		1
GB-T1.01-0	1.01	0
GB-T1.01-1		1
GB-T1.02-0	1.02	0
GB-T1.02-1		1
GB-T1.03-0	1.03	0
GB-T1.03-1		1
GB-T1.04-0	1.04	0
GB-T1.04-1		1
GB-T1.05-0	1.05	0
GB-T1.05-1		1

型號	規格(mm)	等級
GB-T1.06-0	1.06	0
GB-T1.06-1		1
GB-T1.07-0	1.07	0
GB-T1.07-1		1
GB-T1.08-0	1.08	0
GB-T1.08-1		1
GB-T1.09-0	1.09	0
GB-T1.09-1		1
GB-T1.1-0	1.1	0
GB-T1.1-1		1
GB-T1.11-0	1.11	0
GB-T1.11-1		1
GB-T1.12-0	1.12	0
GB-T1.12-1		1
GB-T1.13-0	1.13	0
GB-T1.13-1		1
GB-T1.14-0	1.14	0
GB-T1.14-1		1
GB-T1.15-0	1.15	0
GB-T1.15-1		1
GB-T1.16-0	1.16	0
GB-T1.16-1		1
GB-T1.17-0	1.17	0
GB-T1.17-1		1
GB-T1.18-0	1.18	0
GB-T1.18-1		1
GB-T1.19-0	1.19	0
GB-T1.19-1		1
GB-T1.2-0	1.2	0
GB-T1.2-1		1
GB-T1.21-0	1.21	0
GB-T1.21-1		1
GB-T1.22-0	1.22	0
GB-T1.22-1		1

型號	規格(mm)	等級
GB-T1.23-0	1.23	0
GB-T1.23-1		1
GB-T1.24-0	1.24	0
GB-T1.24-1		1
GB-T1.25-0	1.25	0
GB-T1.25-1		1
GB-T1.26-0	1.26	0
GB-T1.26-1		1
GB-T1.27-0	1.27	0
GB-T1.27-1		1
GB-T1.28-0	1.28	0
GB-T1.28-1		1
GB-T1.29-0	1.29	0
GB-T1.29-1		1
GB-T1.30-0	1.30	0
GB-T1.30-1		1
GB-T1.31-0	1.31	0
GB-T1.31-1		1
GB-T1.32-0	1.32	0
GB-T1.32-1		1
GB-T1.33-0	1.33	0
GB-T1.33-1		1
GB-T1.34-0	1.34	0
GB-T1.34-1		1
GB-T1.35-0	1.35	0
GB-T1.35-1		1
GB-T1.36-0	1.36	0
GB-T1.36-1		1
GB-T1.37-0	1.37	0
GB-T1.37-1		1
GB-T1.38-0	1.38	0
GB-T1.38-1		1
GB-T1.39-0	1.39	0
GB-T1.39-1		1

最佳選擇標章
台灣優良產品金鑽獎

■ 標準塊規【單片】

材質：鎢鋼　硬度：HV1300~1600

型號	規格(mm)	等級
GB-T1.4-0	1.4	0
GB-T1.4-1		1
GB-T1.41-0	1.41	0
GB-T1.41-1		1
GB-T1.42-0	1.42	0
GB-T1.42-1		1
GB-T1.43-0	1.43	0
GB-T1.43-1		1
GB-T1.44-0	1.44	0
GB-T1.44-1		1
GB-T1.45-0	1.45	0
GB-T1.45-1		1
GB-T1.46-0	1.46	0
GB-T1.46-1		1
GB-T1.47-0	1.47	0
GB-T1.47-1		1
GB-T1.48-0	1.48	0
GB-T1.48-1		1
GB-T1.49-0	1.49	0
GB-T1.49-1		1
GB-T1.5-0	1.5	0
GB-T1.5-1		1
GB-T1.6-0	1.6	0
GB-T1.6-1		1
GB-T1.7-0	1.7	0
GB-T1.7-1		1
GB-T1.8-0	1.8	0
GB-T1.8-1		1
GB-T1.9-0	1.9	0
GB-T1.9-1		1
GB-T2.0-0	2.0	0
GB-T2.0-1		1
GB-T2.5-0	2.5	0
GB-T2.5-1		1

型號	規格(mm)	等級
GB-T3.0-0	3.0	0
GB-T3.0-1		1
GB-T3.5-0	3.5	0
GB-T3.5-1		1
GB-T4.0-0	4.0	0
GB-T4.0-1		1
GB-T4.5-0	4.5	0
GB-T4.5-1		1
GB-T5.0-0	5.0	0
GB-T5.0-1		1
GB-T5.5-0	5.5	0
GB-T5.5-1		1
GB-T6.0-0	6.0	0
GB-T6.0-1		1
GB-T6.5-0	6.5	0
GB-T6.5-1		1
GB-T7.0-0	7.0	0
GB-T7.0-1		1
GB-T7.5-0	7.5	0
GB-T7.5-1		1
GB-T8.0-0	8.0	0
GB-T8.0-1		1
GB-T8.5-0	8.5	0
GB-T8.5-1		1
GB-T9.0-0	9.0	0
GB-T9.0-1		1
GB-T9.5-0	9.5	0
GB-T9.5-1		1
GB-T10.0-0	10.0	0
GB-T10.0-1		1
GB-T10.5-0	10.5	0
GB-T10.5-1		1
GB-T11.0-0	11.0	0
GB-T11.0-1		1

型號	規格(mm)	等級
GB-T11.5-0	11.5	0
GB-T11.5-1		1
GB-T12.0-0	12.0	0
GB-T12.0-1		1
GB-T12.5-0	12.5	0
GB-T12.5-1		1
GB-T13.0-0	13.0	0
GB-T13.0-1		1
GB-T13.5-0	13.5	0
GB-T13.5-1		1
GB-T14.0-0	14.0	0
GB-T14.0-1		1
GB-T14.5-0	14.5	0
GB-T14.5-1		1
GB-T15.0-0	15.0	0
GB-T15.0-1		1
GB-T15.5-0	15.5	0
GB-T15.5-1		1
GB-T16.0-0	16.0	0
GB-T16.0-1		1
GB-T16.5-0	16.5	0
GB-T16.5-1		1
GB-T17.0-0	17.0	0
GB-T17.0-1		1
GB-T17.5-0	17.5	0
GB-T17.5-1		1
GB-T18.0-0	18.0	0
GB-T18.0-1		1
GB-T18.5-0	18.5	0
GB-T18.5-1		1
GB-T19.0-0	19.0	0
GB-T19.0-1		1
GB-T19.5-0	19.5	0
GB-T19.5-1		1

■ 標準塊規【單片】

材質：鎢鋼　硬度：HV1300~1600

最佳選擇標章
台灣優良產品金鑽獎

型號	規格(mm)	等級
GB-T20.0-0	20	0
GB-T20.0-1		1
GB-T20.5-0	20.5	0
GB-T20.5-1		1
GB-T21.0-0	21	0
GB-T21.0-1		1
GB-T21.5-0	21.5	0
GB-T21.5-1		1
GB-T22.0-0	22	0
GB-T22.0-1		1
GB-T22.5-0	22.5	0
GB-T22.5-1		1
GB-T23.0-0	23	0
GB-T23.0-1		1
GB-T23.5-0	23.5	0
GB-T23.5-1		1
GB-T24.0-0	24	0
GB-T24.0-1		1
GB-T24.5-0	24.5	0
GB-T24.5-1		1

型號	規格(mm)	等級
GB-T25.0-0	25	0
GB-T25.0-1		1
GB-T30.0-0	30	0
GB-T30.0-1		1
GB-T40.0-0	40	0
GB-T40.0-1		1
GB-T50.0-0	50	0
GB-T50.0-1		1
GB-T60.0-0	60	0
GB-T60.0-1		1
GB-T70.0-0	70	0
GB-T70.0-1		1
GB-T75.0-0	75	0
GB-T75.0-1		1
GB-T80.0-0	80	0
GB-T80.0-1		1
GB-T90.0-0	90	0
GB-T90.0-1		1
GB-T100.0-0	100	0
GB-T100.0-1		1

* 精度：依據DIN 861 / ISO 3650標準
* 單片均附JCC出廠檢驗合格校正報告

■ 標準塊規【整組】

材質：陶瓷　硬度：HV1100~1400

型號	規格(mm)	間隔(mm)	塊數
GB-C9122-0 等級：0級	1.0005	0.0005	1
	1.001-1.009	0.001	9
	1.01-1.49	0.01	49
GB-C9122-1 等級：1級	1.6-1.9	0.1	4
	0.5-24.5	0.5	49
	30-100	10	8
	25,75	-	2
GB-C9112-0 等級：0級	1.0005	0.0005	1
	1.001-1.009	0.001	9
GB-C9112-1 等級：1級	1.01-1.49	0.01	49
	0.5-24.5	0.5	49
	25-100	25	4
GB-C9103-0 等級：0級	1.005	0.005	1
	1.01-1.49	0.01	49
GB-C9103-1 等級：1級	0.5-24.5	0.5	49
	25-100	25	4
GB-C9087-0 等級：0級	1.001-1.009	0.001	9
	1.01-1.49	0.01	49
GB-C9087-1 等級：1級	0.5-9.5	0.5	19
	10-100	10	10

型號	規格(mm)	間隔(mm)	塊數
GB-C9047-0 等級：0級	1.005	0.005	1
	1.01-1.09	0.01	9
GB-C9047-1 等級：1級	1.1-1.9	0.1	9
	1-24	1	24
	25-100	25	4
GB-C9038-0 等級：0級	1.005	0.005	1
	.1.01-1.09	0.01	9
GB-C9038-1 等級：1級	1.1-1.9	0.1	9
	1-9	1	9
	10-100	10	10
GB-C9011-0 等級：0級	1.0	-	1
GB-C9011-1 等級：1級	1.0005	-	1
	1.001-1.009	0.001	9
GB-C9010-0 等級：0級	1.0-1.5	0.25	3
GB-C9010-1 等級：1級	2.0-3.0	1	2
	5.0-25.0	5	5

* 精度：依據DIN 861 / ISO 3650標準
* 整組均附JCC出廠檢驗合格校正報告

■ 標準塊規【單片】

材質：陶瓷　硬度：HV1100~1400

最佳選擇標章
台灣優良產品金鑽獎

型號	規格(mm)	等級
GB-C0.5-0	0.5	0
GB-C0.5-1		1
GB-C1.0-0	1.0	0
GB-C1.0-1		1
GB-C1.0005-0	1.0005	0
GB-C1.0005-1		1
GB-C1.001-0	1.001	0
GB-C1.001-1		1
GB-C1.002-0	1.002	0
GB-C1.002-1		1
GB-C1.003-0	1.003	0
GB-C1.003-1		1
GB-C1.004-0	1.004	0
GB-C1.004-1		1
GB-C1.005-0	1.005	0
GB-C1.005-1		1
GB-C1.006-0	1.006	0
GB-C1.006-1		1
GB-C1.007-0	1.007	0
GB-C1.007-1		1
GB-C1.008-0	1.008	0
GB-C1.008-1		1
GB-C1.009-0	1.009	0
GB-C1.009-1		1
GB-C1.01-0	1.01	0
GB-C1.01-1		1
GB-C1.02-0	1.02	0
GB-C1.02-1		1
GB-C1.03-0	1.03	0
GB-C1.03-1		1
GB-C1.04-0	1.04	0
GB-C1.04-1		1
GB-C1.05-0	1.05	0
GB-C1.05-1		1

型號	規格(mm)	等級
GB-C1.06-0	1.06	0
GB-C1.06-1		1
GB-C1.07-0	1.07	0
GB-C1.07-1		1
GB-C1.08-0	1.08	0
GB-C1.08-1		1
GB-C1.09-0	1.09	0
GB-C1.09-1		1
GB-C1.1-0	1.1	0
GB-C1.1-1		1
GB-C1.11-0	1.11	0
GB-C1.11-1		1
GB-C1.12-0	1.12	0
GB-C1.12-1		1
GB-C1.13-0	1.13	0
GB-C1.13-1		1
GB-C1.14-0	1.14	0
GB-C1.14-1		1
GB-C1.15-0	1.15	0
GB-C1.15-1		1
GB-C1.16-0	1.16	0
GB-C1.16-1		1
GB-C1.17-0	1.17	0
GB-C1.17-1		1
GB-C1.18-0	1.18	0
GB-C1.18-1		1
GB-C1.19-0	1.19	0
GB-C1.19-1		1
GB-C1.2-0	1.2	0
GB-C1.2-1		1
GB-C1.21-0	1.21	0
GB-C1.21-1		1
GB-C1.22-0	1.22	0
GB-C1.22-1		1

型號	規格(mm)	等級
GB- C1.23-0	1.23	0
GB- C1.23-1		1
GB- C1.24-0	1.24	0
GB- C1.24-1		1
GB- C1.25-0	1.25	0
GB- C1.25-1		1
GB- C1.26-0	1.26	0
GB- C1.26-1		1
GB- C1.27-0	1.27	0
GB-C1.27-1		1
GB- C1.28-0	1.28	0
GB- C1.28-1		1
GB- C1.29-0	1.29	0
GB- C1.29-1		1
GB- C1.30-0	1.30	0
GB- C1.30-1		1
GB- C1.31-0	1.31	0
GB- C1.31-1		1
GB- C1.32-0	1.32	0
GB- C1.32-1		1
GB- C1.33-0	1.33	0
GB- C1.33-1		1
GB- C1.34-0	1.34	0
GB- C1.34-1		1
GB- C1.35-0	1.35	0
GB-C1.35-1		1
GB-C1.36-0	1.36	0
GB-C1.36-1		1
GB-C1.37-0	1.37	0
GB-C1.37-1		1
GB-C1.38-0	1.38	0
GB-C1.38-1		1
GB-C1.39-0	1.39	0
GB-C1.39-1		1

■ 標準塊規【單片】

材質：陶瓷　硬度：HV1100~1400

最佳選擇標章
台灣優良產品金鑽獎

型號	規格(mm)	等級
GB-C1.4-0	1.4	0
GB-C1.4-1		1
GB-C1.41-0	1.41	0
GB-C1.41-1		1
GB-C1.42-0	1.42	0
GB-C1.42-1		1
GB-C1.43-0	1.43	0
GB-C1.43-1		1
GB-C1.44-0	1.44	0
GB-C1.44-1		1
GB-C1.45-0	1.45	0
GB-C1.45-1		1
GB-C1.46-0	1.46	0
GB-C1.46-1		1
GB-C1.47-0	1.47	0
GB-C1.47-1		1
GB-C1.48-0	1.48	0
GB-C1.48-1		1
GB-C1.49-0	1.49	0
GB-C1.49-1		1
GB-C1.5-0	1.5	0
GB-C1.5-1		1
GB-C1.6-0	1.6	0
GB-C1.6-1		1
GB-C1.7-0	1.7	0
GB-C1.7-1		1
GB-C1.8-0	1.8	0
GB-C1.8-1		1
GB-C1.9-0	1.9	0
GB-C1.9-1		1
GB-C2.0-0	2.0	0
GB-C2.0-1		1
GB-C2.5-0	2.5	0
GB-C2.5-1		1

型號	規格(mm)	等級
GB-C3.0-0	3.0	0
GB-C3.0-1		1
GB-C3.5-0	3.5	0
GB-C3.5-1		1
GB-C4.0-0	4.0	0
GB-C4.0-1		1
GB-C4.5-0	4.5	0
GB-C4.5-1		1
GB-C5.0-0	5.0	0
GB-C5.0-1		1
GB-C5.5-0	5.5	0
GB-C5.5-1		1
GB-C6.0-0	6.0	0
GB-C6.0-1		1
GB-C6.5-0	6.5	0
GB-C6.5-1		1
GB-C7.0-0	7.0	0
GB-C7.0-1		1
GB-C7.5-0	7.5	0
GB-C7.5-1		1
GB-C8.0-0	8.0	0
GB-C8.0-1		1
GB-C8.5-0	8.5	0
GB-C8.5-1		1
GB-C9.0-0	9.0	0
GB-C9.0-1		1
GB-C9.5-0	9.5	0
GB-C9.5-1		1
GB-C10.0-0	10.0	0
GB-C10.0-1		1
GB-C10.5-0	10.5	0
GB-C10.5-1		1
GB-C11.0-0	11.0	0
GB-C11.0-1		1

型號	規格(mm)	等級
GB-C11.5-0	11.5	0
GB-C11.5-1		1
GB-C12.0-0	12.0	0
GB-C12.0-1		1
GB-C12.5-0	12.5	0
GB-C12.5-1		1
GB-C13.0-0	13.0	0
GB-C13.0-1		1
GB-C13.5-0	13.5	0
GB-C13.5-1		1
GB-C14.0-0	14.0	0
GB-C14.0-1		1
GB-C14.5-0	14.5	0
GB-C14.5-1		1
GB-C15.0-0	15.0	0
GB-C15.0-1		1
GB-C15.5-0	15.5	0
GB-C15.5-1		1
GB-C16.0-0	16.0	0
GB-C16.0-1		1
GB-C16.5-0	16.5	0
GB-C16.5-1		1
GB-C17.0-0	17.0	0
GB-C17.0-1		1
GB-C17.5-0	17.5	0
GB-C17.5-1		1
GB-C18.0-0	18.0	0
GB-C18.0-1		1
GB-C18.5-0	18.5	0
GB-C18.5-1		1
GB-C19.0-0	19.0	0
GB-C19.0-1		1
GB-C19.5-0	19.5	0
GB-C19.5-1		1

■ 標準塊規【單片】

材質：陶瓷　硬度：HV1100~1400

最佳選擇標章
台灣優良產品金鑽獎

型號	規格(mm)	等級
GB-C20.0-0	20	0
GB-C20.0-1		1
GB-C20.5-0	20.5	0
GB-C20.5-1		1
GB-C21.0-0	21	0
GB-C21.0-1		1
GB-C21.5-0	21.5	0
GB-C21.5-1		1
GB-C22.0-0	22	0
GB-C22.0-1		1
GB-C22.5-0	22.5	0
GB-C22.5-1		1
GB-C23.0-0	23	0
GB-C23.0-1		1
GB-C23.5-0	23.5	0
GB-C23.5-1		1
GB-C24.0-0	24	0
GB-C24.0-1		1
GB-C24.5-0	24.5	0
GB-C24.5-1		1
GB-C25.0-0	25	0
GB-C25.0-1		1
GB-C30.0-0	30	0
GB-C30.0-1		1

型號	規格(mm)	等級
GB-C40.0-0	40	0
GB-C40.0-1		1
GB-C41.3-0	41.3	0
GB-C41.3-1		1
GB-C50.0-0	50	0
GB-C50.0-1		1
GB-C60.0-0	60	0
GB-C60.0-1		1
GB-C70.0-0	70	0
GB-C70.0-1		1
GB-C75.0-0	75	0
GB-C75.0-1		1
GB-C80.0-0	80	0
GB-C80.0-1		1
GB-C90.0-0	90	0
GB-C90.0-1		1
GB-C100.0-0	100	0
GB-C100.0-1		1
GB-C125.0-0	125	0
GB-C125.0-1		1
GB-C131.4-0	131.4	0
GB-C131.4-1		1
GB-C150.0-0	150	0
GB-C150.0-1		1

* 精度：依據DIN 861 / ISO 3650標準　* 單片均附JCC出廠檢驗合格校正報告

■ 標準硬鋼塊規【整組/英吋】

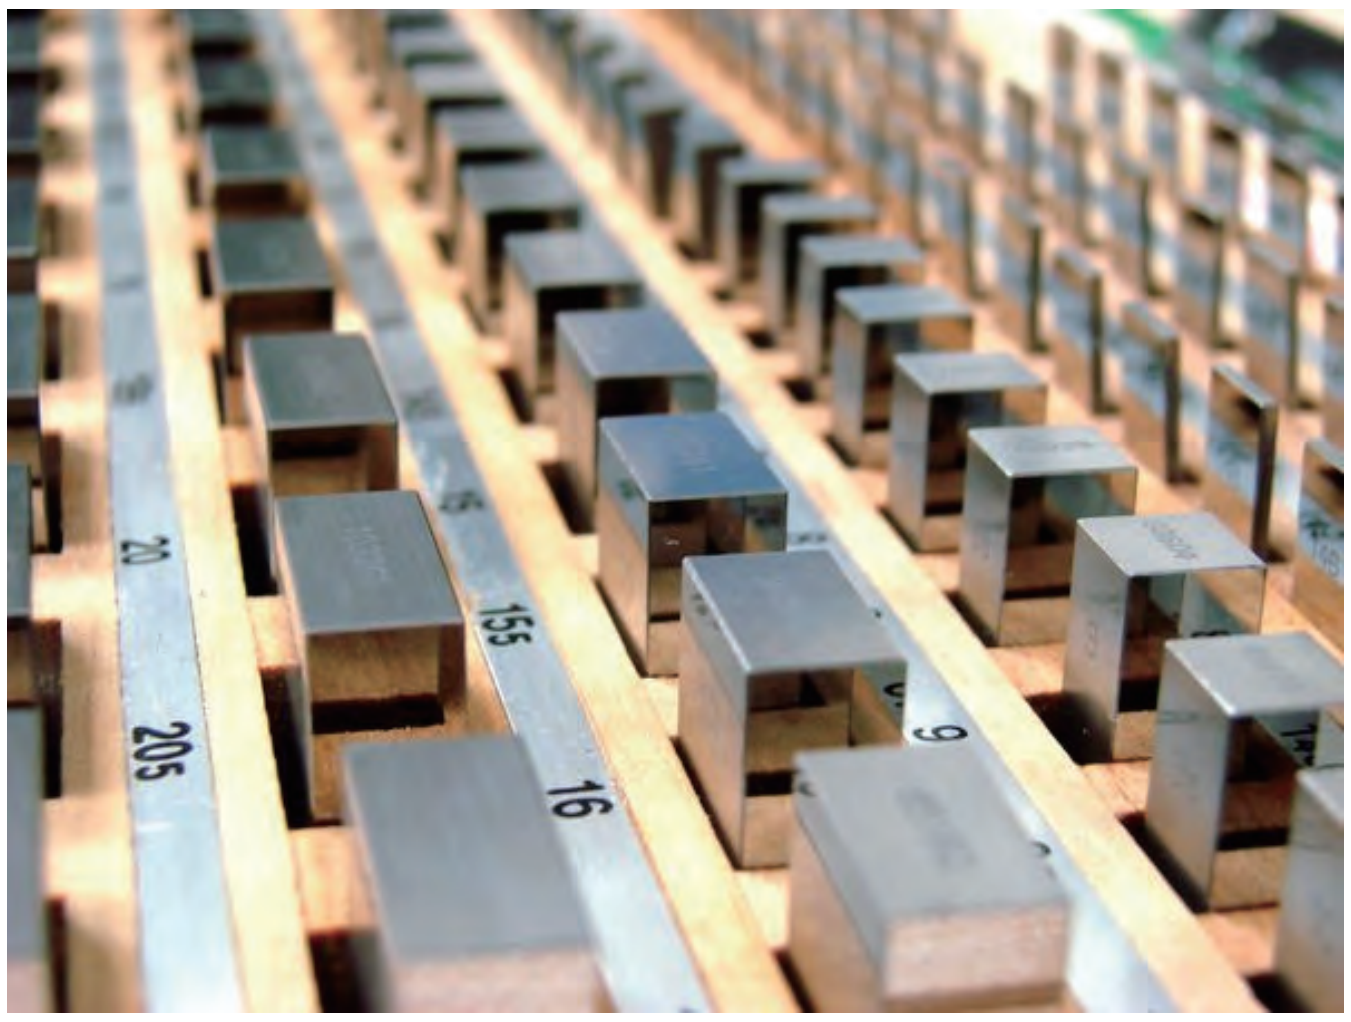

型號	規格(mm)	間隔(mm)	塊數
GB-9081I-0	0.05″	-	1
等級：0級	0.100″	-	1
GB-9081I-1	0.1001″ -0.1009″	0.0001″	9
等級：1級	0.101″ -0.150″	0.001″	50
GB-9081I-2	0.200″ -0.950″	0.05″	16
等級：2級	1.000″ -4.000″	1.000″	4
GB-9036I-0	0.05″	-	1
等級：0級	0.100″	-	1
	0.1001″ -0.1009″	0.0001″	9
GB-9036I-1	0.101″ -0.110″	0.001″	10
等級：1級	0.120″ -0.200″	0.01″	9
GB-9036I-2	0.300″ -0.500″	0.100″	3
等級：2級	1.000″ -2.000″	1.000″	2
	4.000″	-	1

■ 標準鎢鋼塊規【整組/英吋】

型號	規格(mm)	間隔(mm)	塊數
GB-T9081I-0	0.05″	-	1
等級：0級	0.100″	-	1
GB-T9081I-1	0.1001″ -0.1009″	0.0001″	9
等級：1級	0.101″ -0.150″	0.001″	50
GB-T9081I-2	0.200″ -0.950″	0.05″	16
等級：2級	1.000″ -4.000″	1.000″	4
GB-T9036I-0	0.05″	-	1
等級：0級	0.100″	-	1
	0.1001″ -0.1009″	0.0001″	9
GB-T9036I-1	0.101″ -0.110″	0.001″	10
等級：1級	0.120″ -0.200″	0.01″	9
GB-T9036I-2	0.300″ -0.500″	0.100″	3
等級：2級	1.000″ -2.000″	1.000″	2
	4.000″	-	1

■ 標準陶瓷塊規【整組/英吋】

型號	規格(mm)	間隔(mm)	塊數
GB-C9081I-0	0.05″	-	1
等級：0級	0.100″	-	1
GB-C9081I-1	0.1001″ -0.1009″	0.0001″	9
等級：1級	0.101″ -0.150″	0.001″	50
GB-C9081I-2	0.200″ -0.950″	0.05″	16
等級：2級	1.000″ -4.000″	1.000″	4
GB-C9036I-0	0.05″	-	1
等級：0級	0.100″	-	1
	0.1001″ -0.1009″	0.0001″	9
GB-C9036I-1	0.101″ -0.110″	0.001″	10
等級：1級	0.120″ -0.200″	0.01″	9
GB-C9036I-2	0.300″ -0.500″	0.100″	3
等級：2級	1.000″ -2.000″	1.000″	2
	4.000″	-	1

＊精度：依據ASME B89.1.9-2002標準　＊整組均附JCC出廠檢驗合格校正報告